



at&t



Proud Sponsor

Quick start guide

TL76108

**5.8 GHz 2-line corded/cordless
telephone/answering system with
caller ID/call waiting**



Installation preparation

You must install and charge the battery before using the telephone.



See page 5 for easy instructions.

If you subscribe to high-speed Internet service (Digital Subscriber Line - DSL) through your telephone lines, you must install a DSL filter between the telephone base and the telephone wall jack (pages 2-4). The filter will prevent noise and caller ID problems caused by DSL interference. Please contact your DSL service provider for more information about DSL filters.

Your product may be shipped with a protective sticker covering the handset or telephone base display - remove it before use.

For customer service or product information, visit our website at **www.telephones.att.com** or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.

Avoid placing the telephone base too close to:

- Communication devices such as: television sets, VCRs, or other cordless telephones.
- Excessive heat sources.
- Noise sources such as a window with traffic outside, motors, microwave ovens, refrigerators, or fluorescent lighting.
- Excessive dust sources such as a workshop or garage.
- Excessive moisture.
- Extremely low temperature.
- Mechanical vibration or shock such as on top of the washing machine or work bench.


Telephone base installation (2-line jack)

If you subscribe to high-speed Internet service (Digital Subscriber Line - DSL) through your telephone lines, you must install a DSL filter between the telephone base and the telephone wall jack. The filter will prevent noise and caller ID problems caused by DSL interference. Please contact your DSL service provider for more information about DSL filters.

The telephone line cord can be plugged into **LINE 1/L1+L2** or **LINE 2** telephone jack in the telephone base. However, it is suggested to plug the telephone line cord with two telephone numbers into the **LINE 1/L1+L2** telephone jack if you intend to connect the telephone to a fax machine or modem through the **DATA** port.

If you have a **2-line wall jack**, install the telephone base as shown below.

Telephone base installation

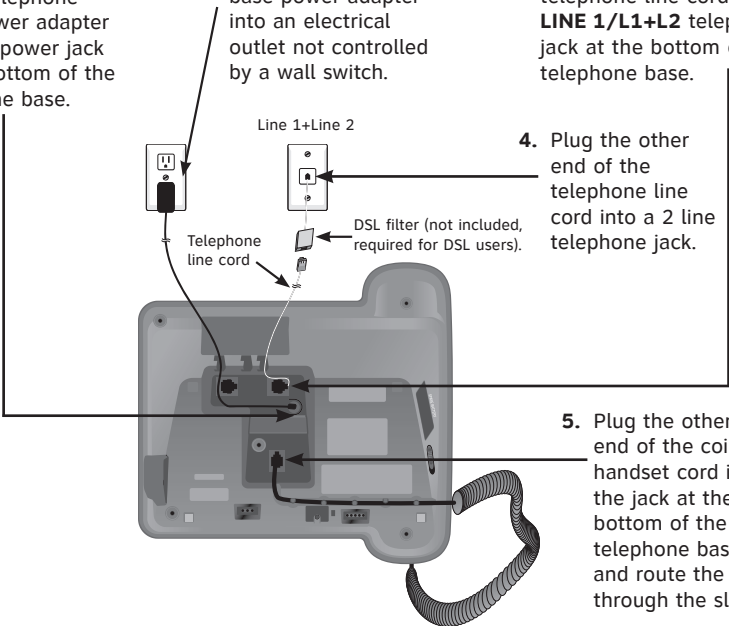1. Plug the small end of the telephone base power adapter into the power jack at the bottom of the telephone base.
 2. Plug the telephone base power adapter into an electrical outlet not controlled by a wall switch.
 3. Plug one end of the telephone line cord into the **LINE 1/L1+L2** telephone jack at the bottom of the telephone base.
 4. Plug the other end of the telephone line cord into a 2 line telephone jack.
 5. Plug the other end of the coiled handset cord into the jack at the bottom of the telephone base and route the cord through the slots.
- 
- A diagram illustrating the installation of a telephone base. The base is shown with various ports and a coiled handset cord. A power adapter is plugged into the bottom power jack. A telephone line cord is plugged into the 'LINE 1/L1+L2' jack. A DSL filter is shown between the line cord and the wall jack. A coiled handset cord is plugged into the bottom jack and routed through the slots. Arrows point from the numbered instructions to the corresponding components in the diagram.

IMPORTANT INFORMATION

1. Use only the power adapters supplied with this product or equivalent. To order a replacement power adapter, visit our website at **www.telephones.att.com**, or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.
2. These power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.


Telephone base installation (1-line jack)

If you subscribe to high-speed Internet service (Digital Subscriber Line - DSL) through your telephone lines, you must install a DSL filter between the telephone base and the telephone wall jack. The filter will prevent noise and caller ID problems caused by DSL interference. Please contact your DSL service provider for more information about DSL filters.

The telephone line cord can be plugged into either **LINE 1/L1+L2** or **LINE 2** telephone jack. However, you have to plug the telephone line cord into **LINE 2** jack if you need to connect to a fax machine or modem through **DATA** port. All data will only be transmitted through **LINE 2** jack.

If you have **1-line wall jack**, install the telephone base as shown below.

Telephone base installation

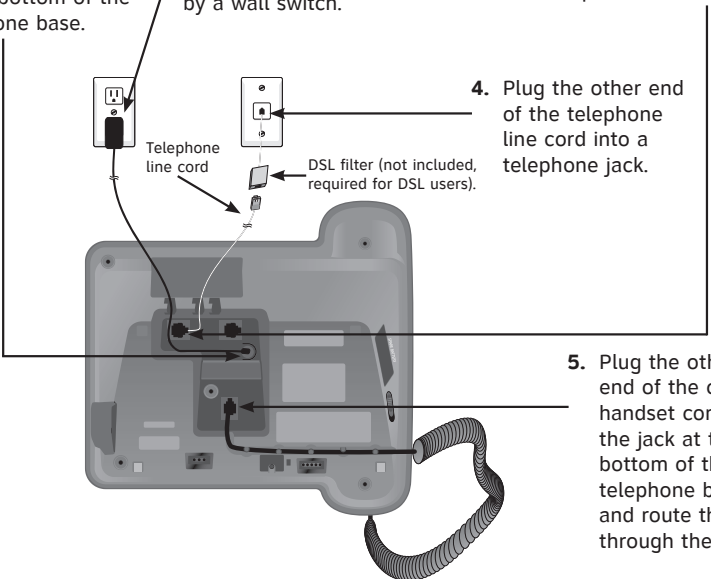1. Plug the small end of the telephone base power adapter into the power jack at the bottom of the telephone base.
 2. Plug the telephone base power adapter into an electrical outlet not controlled by a wall switch.
 3. Plug one end of the telephone line cord into the **LINE 1/L1+L2** or **LINE 2** telephone jack at the bottom of the telephone base.
 4. Plug the other end of the telephone line cord into a telephone jack.
 5. Plug the other end of the coiled handset cord into the jack at the bottom of the telephone base and route the cord through the slots.
- 

IMPORTANT INFORMATION

1. Use only the power adapters supplied with this product or equivalent. To order a replacement power adapter, visit our website at **www.telephones.att.com**, or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.
2. These power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.


Telephone base installation (separate line jack)

If you subscribe to high-speed Internet service (Digital Subscriber Line - DSL) through your telephone lines, you must install a DSL filter between the telephone base and the telephone wall jack. The filter will prevent noise and caller ID problems caused by DSL interference. Please contact your DSL service provider for more information about DSL filters.

Each of the telephone line cord can be plugged into **LINE 1/L1+L2** or **LINE 2** telephone jack. Telephone line cord plugged into **LINE 2** jack will be used for data transmission.

If you have **separate wall jacks** for each line, install the telephone base as shown below.

Telephone base installation

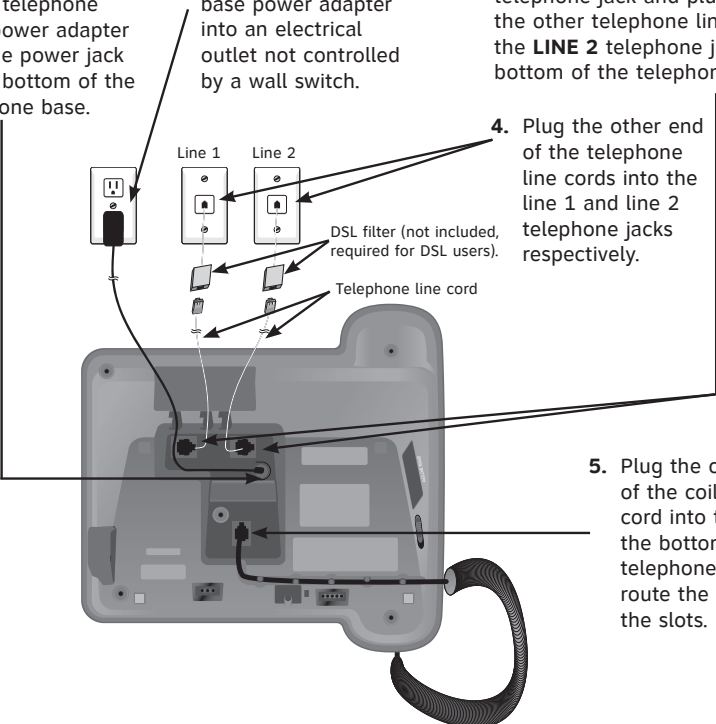1. Plug the small end of the telephone base power adapter into the power jack at the bottom of the telephone base.
 2. Plug the telephone base power adapter into an electrical outlet not controlled by a wall switch.
 3. Plug one end of the telephone line cord into the **LINE 1/L1+L2** telephone jack and plug one end of the other telephone line cord into the **LINE 2** telephone jack at the bottom of the telephone base.
 4. Plug the other end of the telephone line cords into the line 1 and line 2 telephone jacks respectively.
 5. Plug the other end of the coiled handset cord into the jack at the bottom of the telephone base and route the cord through the slots.
- 

IMPORTANT INFORMATION

1. Use only the power adapters supplied with this product or equivalent. To order a replacement power adapter, visit our website at **www.telephones.att.com**, or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.
2. These power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.

Handset battery installation & charging

Install the battery as shown below. After installing the battery, you can make and receive short calls, but replace the handset in the charger when the handset is not being used. For optimal performance, charge the handset battery for at least 16 hours before use. When fully charged, the handset battery provides up to approximately eight hours of talk time or four days of standby time.



Step ①

Press the tab and slide the battery compartment cover downwards.



Step ②

Insert the supplied battery as indicated. Insert the top (on contacts and tab) in first, then push downwards on the lower portion of the battery.



Step ③

Align the cover flat against the battery compartment, then slide it upwards until it clicks into place.

Step ④


Charge the handset by placing it facing the front in the charger. The **CHARGE** light will be on when the handset is charging.



IMPORTANT INFORMATION

Use only the battery supplied with this product. To order a replacement or spare battery (AT&T model 102, part number 89-1324-00-00) or equivalent, visit our website at **www.telephones.att.com**, or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.

Charger installation & data port use

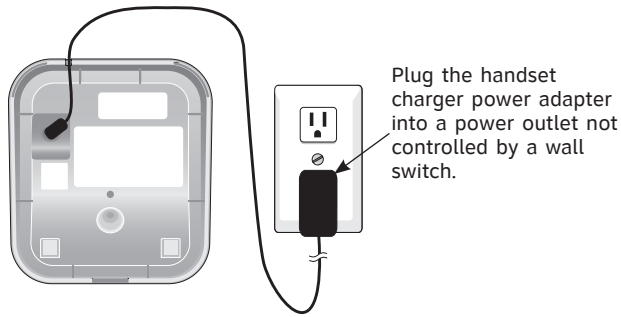


IMPORTANT INFORMATION

- 1. Use only the power adapters supplied with this product or equivalent. To order a replacement power adapter, visit our website at **www.telephones.att.com**, or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.
- 2. These power adapters are intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet outlet.

You may connect a fax machine or modem through the **DATA** port located at the back of the telephone base (as shown below).

For installation with 2-line jack, telephone line should be plugged into **LINE 1/L1+L2** jack (page 2); for installation with 1-line jack, telephone line jack should be plugged into **LINE 2** jack (page 3); for installation with separate line, data will be transmitted through **LINE 2** jack (page 4).

Use **DATA** port at the back of the telephone to connect to the fax or modem if desired.

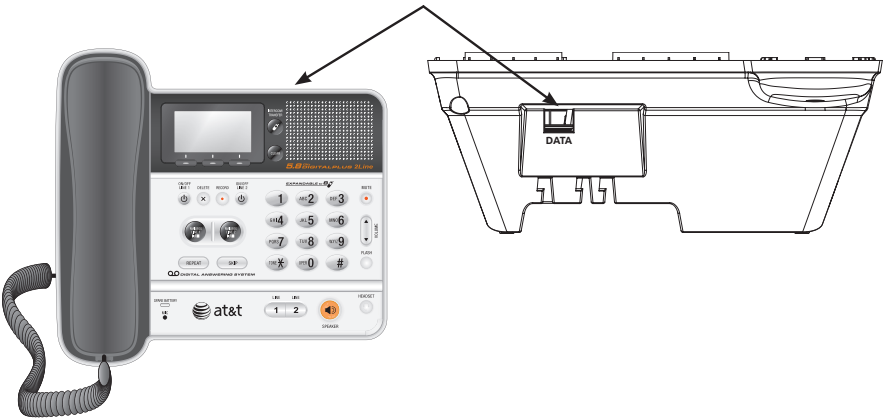

Quick reference guide - handset

New message indicator

Flashes when there is a new message in the answering system.

Softkeys

Press to select an item displayed above the key.

LINE1/FLASH, LINE2/FLASH

Press **LINE1/FLASH** to make or answer a call on line 1. During a call, press to receive an incoming call on line 1 if you subscribe to call waiting.

Press **LINE2/FLASH** to make or answer a call on line 2. During a call, press to receive an incoming call on line 2 if you subscribe to call waiting.

SPEAKER

Press to turn on the handset speakerphone. Press again to resume normal handset use.

OFF/CLEAR


During a call, press to hang up. While using menus, press to cancel an operation, back up to the previous menu, or exit the menu display. While predialing, press to delete digit.

X-FER/INTERCOM


Press to begin an intercom conversation or to transfer a call.

VOLUME

Press to adjust listening volume when on a call.

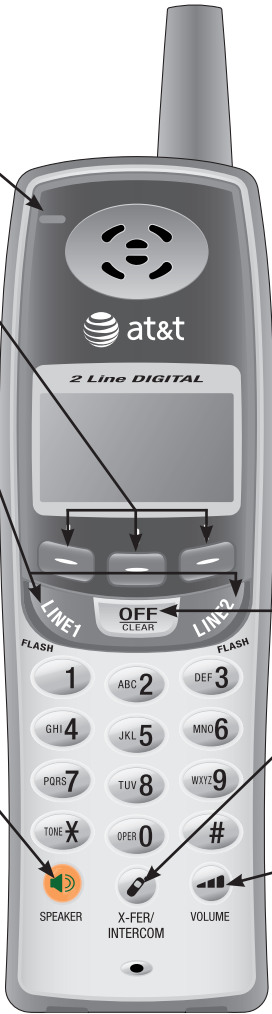


Feature menu

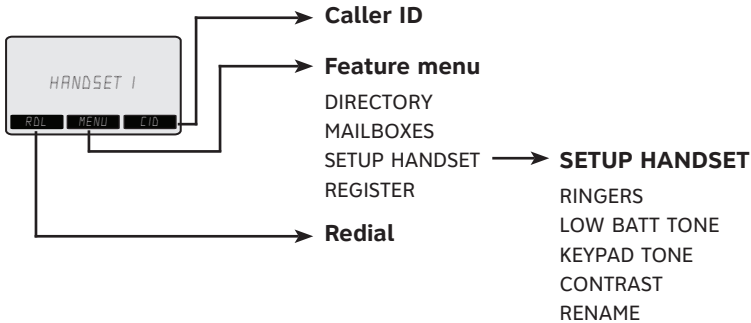

Quick reference guide - telephone base

Softkeys

Press to select the item displayed just above the key.

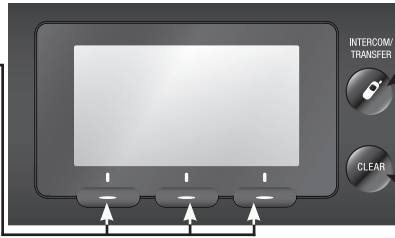

INTERCOM/TRANSFER

Press to begin an intercom conversation or to transfer a call.

CLEAR

While using menus, press to cancel an operation, back up to the previous menu, or exit the menu display.

RECORD

Press to record a memo, a telephone conversation, or an outgoing announcement.

DELETE

Press to delete the message currently playing. When no messages are playing, press to delete all messages.

ON/OFF LINE 1, ON/OFF LINE 2

Press to turn the answering machine for line 1 or line 2 on or off.

MAILBOX LINE 1 ►/■, MAILBOX LINE 2 ►/■

Press to start or stop message playback in the mailbox line 1 or line 2.

SPARE BATTERY indicator

On while the spare battery is installed and charging.

REPEAT

Press to repeat the message currently playing. Press **twice** to play the previous message.

SKIP

Press to skip the message currently playing.

MUTE

Press to turn off the microphone; press again to resume your conversation.

VOLUME

Press to adjust the speakerphone volume (if speakerphone is on), message playback volume (during playback), or corded handset volume (when on a call).

FLASH

During a call, press to receive an incoming call if you subscribe to call waiting.

HEADSET


Press to activate headset.

SPEAKER

Press to turn the base speakerphone on or off.

LINE 1, LINE 2

Press and then lift the handset to make or answer a call on line 1 or line 2.

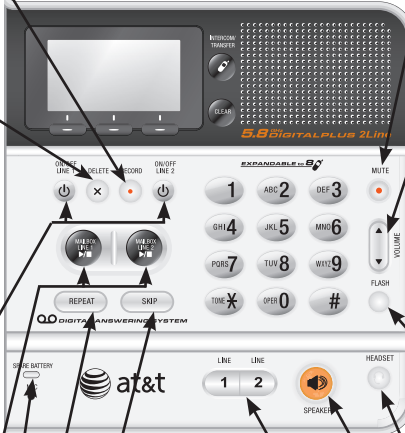

For complete instructions, please refer to the user's manual. If you are unable to find your manual, please visit www.telephones.att.com to read and/or download the manual.



Proud Sponsor

www.telephones.att.com