



## Parts checklist

- Handset  
(2 for TL92273)  
(3 for TL92373)  
(4 for TL92473)
- Charger with power adapter  
(1 for TL92273)  
(2 for TL92373)  
(3 for TL92473)
- Telephone base
- Telephone line cord
- Telephone base power adapter
- Battery compartment cover  
(2 for TL92273)  
(3 for TL92373)  
(4 for TL92473)
- Battery  
(2 for TL92273)  
(3 for TL92373)  
(4 for TL92473)
- Wall mount bracket
- Abridged user's manual
- Quick start guide

## Basic steps to set up & operate your phone

- 1** Install telephone base & charger
- 2** Install handset battery
- 3** Install telephone base on the wall (optional)

- 4** Set date and time
- 5** Set ringer volume
- 6** Add a Bluetooth cell phone / headset
- 7** Download a cell phone directory
- 8** Record own announcement
- 9** Set number of rings

- 10 Directory
- 11 Caller ID

**Click!**

**DSL filter**  
If you have DSL high-speed Internet service, a DSL filter (not included) is required.

**Click!**

**Plug!**

**Plug!**

**Click!**

**Plug!**

The diagram illustrates the connection of a console to a wall outlet. It shows a console with a DSL filter connected to the Internet port, a power cable connected to the power port, and a power cable connected to the wall outlet. Callouts indicate the 'Click!' sound for the DSL filter and power cable connections, and the 'Plug!' sound for the power cable connection to the wall outlet.

1 Plug!

2

3

! Charge for at least 30 minutes before initial settings. Charge for 11 hours before initial use.

4 Light on!

The diagrams illustrate the following steps:

- Step 1:** Unplug the power supply from the wall outlet and the console. Callouts: "Unplug!"
- Step 2:** Align the power supply with the console's internal slot. Callouts: "Align!"
- Step 3:** Plug the power supply into the wall outlet and connect the power cable to the console. Callouts: "Plug!", "Click!". A note states: "If you have DSL high-speed Internet service, a DSL filter (not included) is required."
- Step 4:** Align the console with the wall outlet. Callouts: "Align!"
- Step 5:** Push the console into the wall outlet. A downward arrow indicates the direction of movement.

**INSTALLATION COMPLETED!**  
Keep reading for common settings and operations.

1. Press **MENU** -> Press **▼/▲** to **Set date/time** -> Press **SELECT**.
2. Enter the month (**MM**), day (**DD**) and year (**YY**) -> Press **NEXT**.
3. Enter the hour (**HH**) and minute (**MM**).
4. Press **▼/▲** to choose **AM** or **PM** -> Press **SAVE**.

1. Press **MENU** -> Press **▼/▲** to **Ringers** -> Press **SELECT**.
2. Press **SELECT** to select **Ringer volume**.
3. Press **▼/▲** to choose the desired level -> Press **SET**.

- Enter the cell phone passcode (typically **0000**) if required -> Press **SET**.
- Enter the PIN (default PIN: **0000**) of the telephone base into your cell phone if required.

1. Press **MENU** -> Press **▼/▲** to **Bluetooth** -> Press **SELECT**.
2. Press **SELECT** to select **Add device**.
3. Press **▼/▲** to **Add headset** -> Press **SELECT**.
4. Disconnect your headset from any Bluetooth device -> Press **NEXT**.
5. Set your headset to discoverable mode -> Press **NEXT**.
6. Press **▼/▲** to choose your headset if required -> Press **SELECT**.
  - Enter the PIN (typically **0000**) of your headset if required and press **NEXT**.

7

Download a cell phone directory

Before downloading a directory, make sure the cell phone is paired, active, and connected to your **TL92273/TL92373/TL92473**.

- To download a cell phone directory using a cordless handset:**
1. Press **MENU** -> Press ▼/▲ to **Bluetooth** -> Press **SELECT**.
  2. Press ▼/▲ to **Download dir** -> Press **SELECT**.
  3. Press ▼/▲ to choose among **Phone memory**, **SIM card only** or **Phone and SIM** -> Press **SELECT**.
  4. Press **NEXT** to start downloading if necessary.
    - Enter the cell phone passcode if necessary, then press **SET**.
    - Press a key on your cellphone to confirm the directory download if required.
  5. Press **OK** to exit.

If you are using Bluetooth-enabled cell phones with Android® OS 2.3 or above, you may also download the **Connect to Cell™** application (consists of **Caller ID manager** and **Alerts manager**) using the Google Play® Store app to extend the flexibility of your TL92273/TL92373/TL92473. Scan the QR code on the right to download the application.



8

Record own announcement

You can use the preset announcement to answer calls, or replace it with your own recorded announcement.

- Using a cordless handset:**
1. Press **MENU** -> Press ▼/▲ to **Answering sys** -> Press **SELECT**.
  2. Press **SELECT** to select **Announcement**.
  3. Press **SELECT** to select **Record annnc**.
  4. Facing the handset, record your announcement and press **STOP** to end recording.

9

Set number of rings

You can set the answering system to answer an incoming call after 2, 3, 4, 5 or 6 rings, or toll saver. If you choose toll saver, the answering system answers a call after two rings if you have new messages, or after four rings when there are no new messages.

- Using a cordless handset:**
1. Press **MENU** -> Press ▼/▲ to **Answering sys** -> Press **SELECT**.
  2. Press ▼/▲ to **Ans sys setup** -> Press **SELECT**.
  3. Press ▼/▲ to **# of rings** -> Press **SELECT**.
  4. Press ▼/▲ to choose among **6, 5, 4, 3, 2** or **Toll saver** -> Press **SELECT**.

SETUP DONE!


Keep reading for some common operations.

10

Directory

- The directory stores up to 200 entries.
- To add an entry in the home directory:**
- Using a cordless handset:**
1. Press **MENU** -> Press ▼/▲ to **Directory** -> **SELECT**.
  2. Press **OPTION** to select **Home**.
  3. Press **SELECT** to select **Add contact**.
  4. Enter a telephone number -> Press **NEXT**.
  5. Press ▼/▲ to select **Home**, **Cell**, **Work** or **Other** -> Press **NEXT**.
  6. Enter a name -> Press **SAVE**.

- To review and dial a directory entry:**
- Using a cordless handset:**
1. Press **DIR** in idle mode -> Press ▼/▲ to select the desired directory -> Press **REVIEW**.
  2. Press ▼/▲ to browse through the directory, or press the dialing keys to start a name search.
  3. Press **HOME** or **/SPEAKER** to call using the home line.  
**-OR-**  
Press **CELL 1** or **CELL 2** to call using the cell line.



11

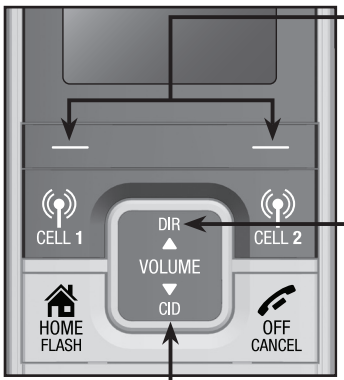
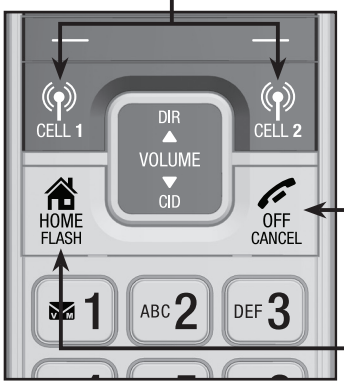
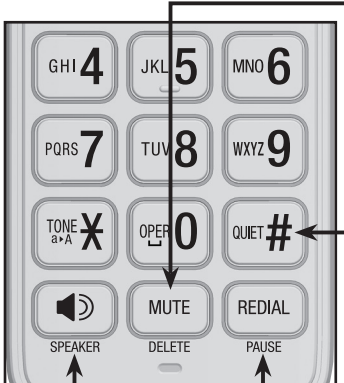

Caller ID

- The caller ID log stores up to 50 entries.
- To review and dial a caller ID entry:**
- Using a cordless handset:**
1. Press **CID** in idle mode -> Press ▼/▲ to scroll through the list.
  2. Press **HOME** or **/SPEAKER** to dial with the home line.  
**-OR-**  
Press **CELL 1** or **CELL 2** to dial with the cell line.



- To erase the missed call indicator:**
- Using a cordless handset:**
- The screens display **XX missed calls** when you have incoming calls that have not been answered. When you have reviewed all the missed calls, the missed call indicator is erased.
- If you want to erase the missed call indicator without reviewing the caller ID log, press and hold **CANCEL** in idle mode.

Handset operation

- 
- Show the menu.
  - Select an item or save an entry or setting in a menu.
  - Review the directory.
  - Increase the listening volume.
  - Review the caller ID log.
  - Decrease the listening volume.
- 
- Make or answer a cell call.
  - Answer an incoming CELL 1/CELL 2 call during a CELL 1/CELL 2 call.
  - End a home or cell call.
  - Make or answer a home call.
  - Answer a call waiting call during a home call.
- 
- Mute a call.
  - Delete a digit or character.
  - Press and hold to set QUIET mode or to deactivate QUIET mode.
  - Press repeatedly to review the redial list.
  - Add a dialing pause while dialing or entering a number.
- 
- Make a home call using the speakerphone.
  - Answer a home or cell call using the speakerphone.

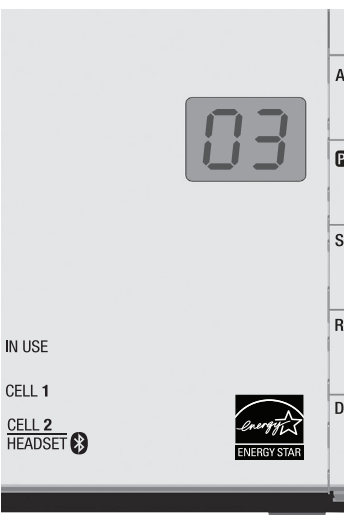
Answering system operation


Your telephone has a built-in answering system and supports voicemail feature offered by your telephone service provider (subscription is required, and fees may apply).

- Answering system and voicemail**
- OO To use the built-in answering system:**
- Refer to this Quick start guide for basic instructions. For complete instructions, see the Abridged user's manual in the package or the Complete user's manual at [www.telephones.att.com/manuals](http://www.telephones.att.com/manuals).

- VM To use the voicemail:**
- Press and hold **1** on the handset to dial the preset voicemail number, and then enter a security code. Contact your telephone service provider for detailed information.

**The built-in answering system must be turned on to answer and record messages.**

- 
- Turn the answering system on or off.
  - Start message playback.
  - Stop msgsg playback.
  - Skip to the next message.
  - Repeat the playing message.
  - Press twice to listen to the previous message.
  - Delete the playing message.

- 
- Adjust the speaker volume.

For more detailed instructions, please refer to the Abridged user's manual provided in your package, or for a full set of installation and operation instructions, refer to the online **TL92273/TL92373/TL92473 DECT 6.0 cordless telephone/answering system with BLUETOOTH® wireless technology** Complete user's manual at [www.telephones.att.com/manuals](http://www.telephones.att.com/manuals).

For customer service or product information, visit our website at [www.telephones.att.com](http://www.telephones.att.com) or call **1 (800) 222-3111**. In Canada, dial **1 (866) 288-4268**.

The *Bluetooth®* word mark and logos are owned by Bluetooth SIG, Inc. and any use of such marks by Advanced American Telephones and its parent, VTech Holdings Limited, is under license. VTech Holdings Limited is a member of Bluetooth SIG, Inc. Other trademarks and trade names are those of their respective owners.

© 2013 Advanced American Telephones. All Rights Reserved.  
AT&T and the AT&T logo are trademarks of AT&T Intellectual Property licensed to Advanced American Telephones, San Antonio, TX 78219.  
Android® and Google Play® are registered trademarks of Google Inc.  
Connect to Cell™ is a trademark of Advanced American Telephones.  
Printed in China. Issue 2 AT&T 04/13.